


SOLAR MODULE
ECS-5M-36
MONOCRYSTALLINE MODULE
5W / 36 Cells / 5 Bus bars



LINEAR PERFORMANCE WARRANTY

12-Year Product Warranty • 25-Year Linear Power Warranty

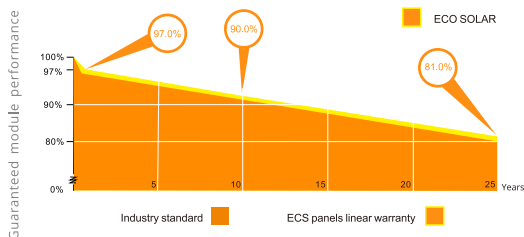

Eco Solar energy's modules are only made of grade A solar cells with a very high efficiency and ensured more than 25 years lifespan.

KEY FEATURES



5 bus bars cells, with efficiency up to 22.8 %



IP67 junction box for long term weather endurance



High quality aluminum frame, resisting load up to 5400 Pa and wind pressure up to 2400 Pa



High transmissivity, low-iron tempered glass



High performance in low-light environment



Double EL test before and after lamination



OUTPUT POWER WARRANTY



PRODUCT WARRANTY

ELECTRICAL DATA AT STC*

Maximum power (Pmax)	5W
Power tolerance	0 - 3%
Voltage at Pmax (Vmp)	19.2V
Current at Pmax (Imp)	0.27A
Open-circuit voltage (Voc)	23.2V
Short-circuit current (Isc)	0.28A

TEMPERATURE CHARACTERISTICS

NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Temperature coefficient of Voc	-(0.40 ± 0.05)%/ °C
Temperature coefficient of Isc	(0.065 ± 0.01)%/ °C
Temperature coefficient of power	-(0.5±0.05)%/ °C


MAXIMUM RATINGS

Operating temperature	-40°C to 85°C
Maximum system voltage	600V DC
Max series fuse rating	3A
Max front load (e.g.:snow)	5400 Pa
Max back load (e.g.:wind)	2400 Pa


MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline
Number of cells	36
Dimensions	251x186x17mm
Weight	0.68kg
Glass	3.2mm Tempered Glass
Frame	Silver/Black Anodized Aluminium Alloy
Junction Box	IP67
Cable	Optional
Connector	Optional

Dimensions in brackets are in inches.
Un-bracketed dimensions are in millimeters.
Unit:mm[in.]




Junction Box
Top View (Lid open)




Section A-A

I-V CURVES


I-V Curves of PV module ECS-5M-36



I-V Curves of PV module ECS-5M-36 at various cell temperatures

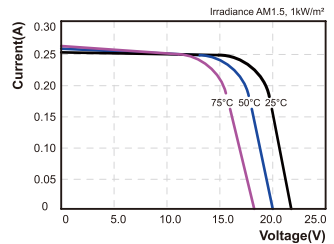

DIMENSIONS OF PV MODULES (mm)

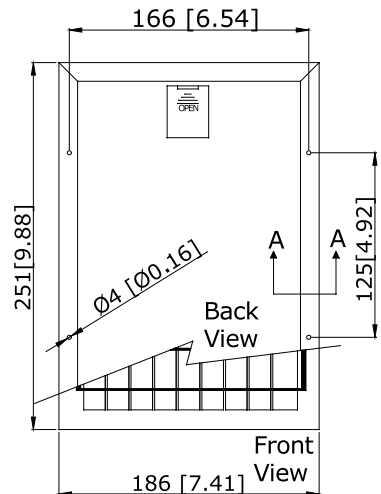

Eco Solar energy®
Powering Future